

HiLook

SUPERIOR
PERFORMANCE-TO-PRICE
SURVEILLANCE

TEHRAN NET

02146093954


HILOOK
IP SOLUTION




VIDEO SURVEILLANCE SOLUTION

Looking for High Performance? Looking for Low Price? Look at HiLook.

HiLook, Hikvision's offshoot brand, hits the bullseye for the entry-level video surveillance market, providing very cost-effective, easy-to-use and reliable products and services.

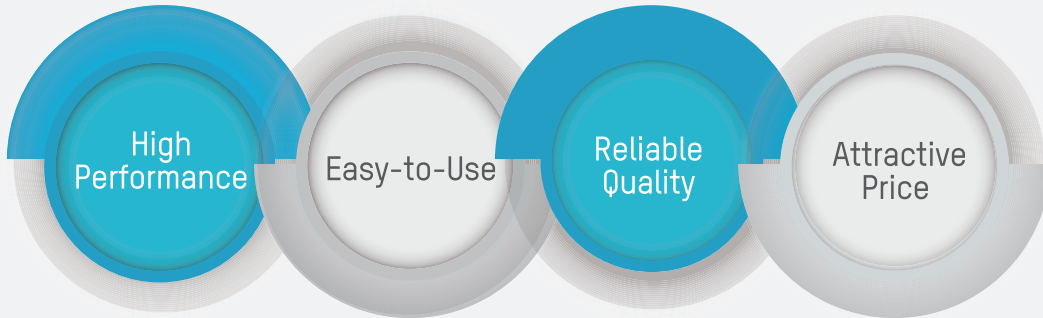

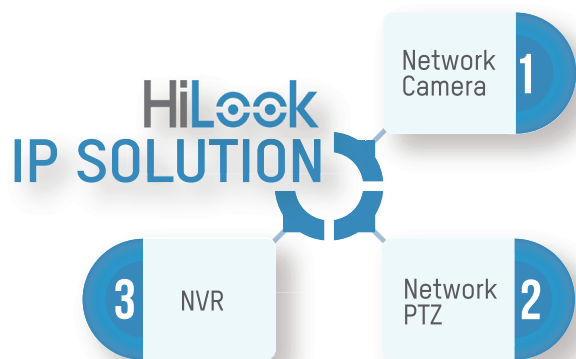


HiLook

IP SOLUTION


With an incredible cost-to-performance ratio, the HiLook Series boasts the most advanced features for the price: the H.265+ high-efficiency codec for maximum bandwidth and data storage efficiency, up to 4 MP super-high-definition imaging, EXIR 2.0 for higher infrared luminous efficiency, and wide dynamic range to balance color and brightness under harsh lighting conditions. HiLook is a whole new look for high-performance, cost-effective video surveillance for small-to-medium business applications.



4MP SUPER-HIGH DEFINITION RESOLUTION

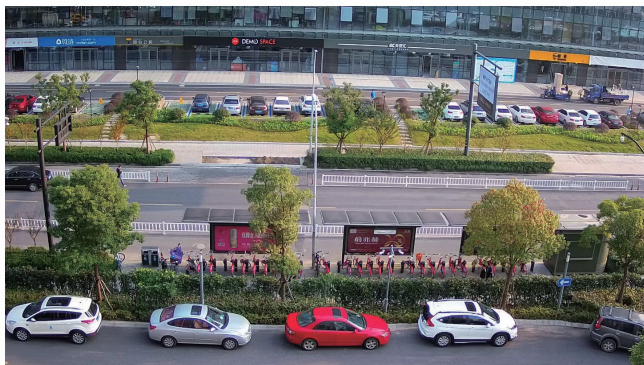

Sharp detail in the daytime



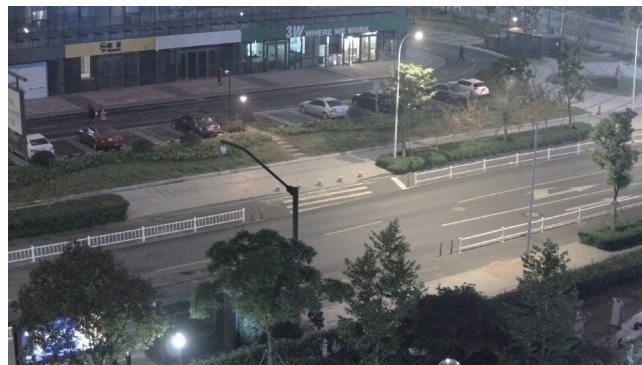


High color fidelity at night

H.265+

HIKVISION'S OWN HIGH-EFFICIENCY CODEC

The H.265+ high-efficiency codec not only reduces bandwidth but also decreases storage requirements, improving overall system performance by up to 83%. Compared to H.265, H.265+ can double surveillance recording duration. And compared to H.264, it can support four times the number of video cameras – or more. HiLook saves you time and resources with H.265+.

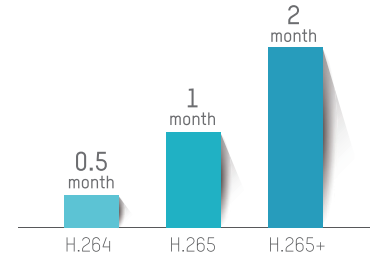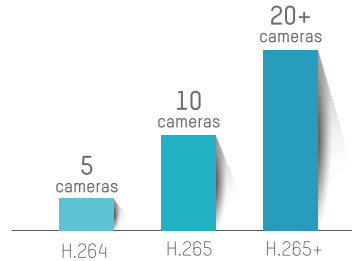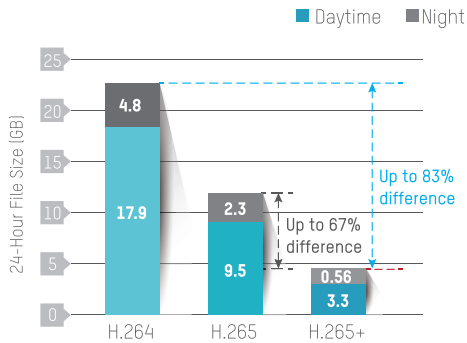

24-Hour recording file size (GB) comparing H.264, H.265, and H.265+

*Data was tested in a common scene; for reference only.



20 MB Broadband Network



Eight 2-MP cameras



5TB HDDs


WDR

COLOR CORRECTION FOR EXCELLENT IMAGING

Wide dynamic range (WDR) performance maintains image fidelity without detail loss when facing toward harsh light. The 120 dB WDR integrated into HiLook's network cameras ensures accurate on-screen colour when facing toward bright sunlight, for example. In these environments, conventional cameras would record a only silhouette, rendering critical footage useless. HiLook records with accurate colour and detail, 24/7.



WDR off

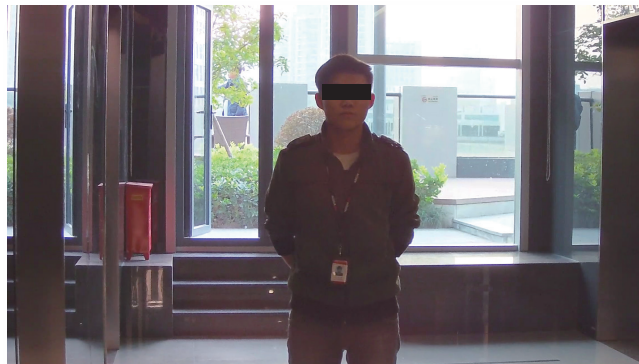

WDR on

EXIR 2.0


EXTENDED INFRARED POWER

For 24-hour surveillance, infrared video is essential at night and in dark environments. EXIR 2.0 provides a higher luminous efficiency for infrared surveillance, improving images where and when it's critical. The amazing 500-metre (1,500-foot) range, combined with up to 4 MP super-HD imaging, makes it the ultimate performer in demanding applications.



EXIR 2.0

MORE FEATURES

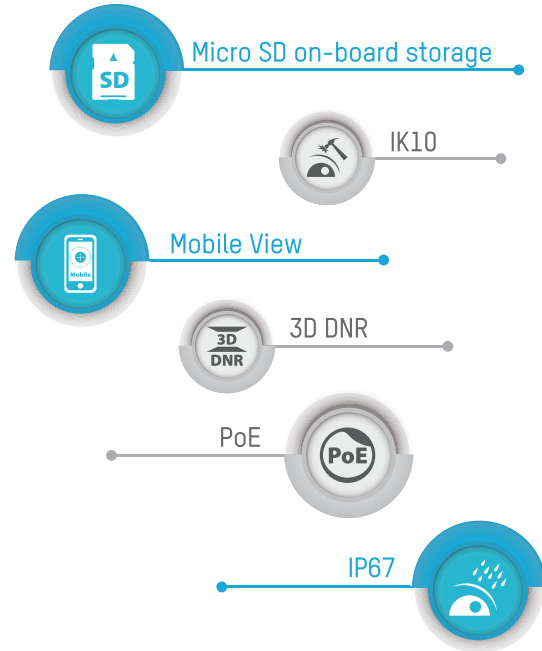

NETWORK CAMERA



IPC-B140H

4MP Bullet IR Network Camera

- Up to 4 MP high resolution
- 2.8/4/6 mm fixed lens
- Supports H.265+/H.265, H.264+/H.264
- Front Cover: Metal
- Rear Cover & Bracket: Plastic
- IR Range: Up to 30 m
- IP67, DWDR
- Supports PoE

1300000T



IPC-D140H

4MP Dome IR Network Camera

- Up to 4 MP high resolution
- 2.8/4/6 mm fixed lens
- Supports H.265/H.265+, H.264/H.264+
- Base: Metal, Cover: Plastic
- IR Range: Up to 30 m
- IP67, IK10, DWDR
- Supports PoE

1380000T



IPC-T140H

4MP Turret IR Network Camera

- Up to 4 MP high resolution
- 2.8/4/6 mm fixed lens
- Supports H.265/H.265+, H.264/H.264+
- Cover & Base: Metal, Eyeball: Plastic
- IR Range: Up to 30 m
- IP67, DWDR
- Supports PoE

1265000T



IPC-B640H-V/Z

2MP VF Bullet IR Network Camera

- Up to 4 MP high resolution
- 2.8 - 12 mm VF lens
- Supports H.265/H.265+, H.264/H.264+
- Full Metal
- IP67, 120dB WDR
- IR Range: Up to 30 m
- Supports PoE & TF card slot
- -V: manual vari-focal lens
- -Z: motorized vari-focal lens

2150000T



IPC-D620H-V/Z

2MP VF Dome IR Network Camera

- Up to 2 MP high resolution
- 2.8 - 12 mm VF lens
- Supports H.265/H.265+, H.264/H.264+
- IP67 & IK10, 120dB WDR
- IR Range: Up to 30 m
- Supports PoE & TF card slot
- -V: manual vari-focal lens,
- -Z: motorized vari-focal lens

2150000T



IPC-B110

1MP Bullet IR Network Camera

- Up to 1 MP high resolution
- 2.8/4/6 mm fixed lens
- Supports H.264+/H.264
- Front Cover: Metal
- Rear Cover & Bracket: Plastic
- IR Range: Up to 30 m
- IP67, DWDR
- Supports PoE

NETWORK CAMERA



IPC-D120

2MP Dome IR Network Camera

- Up to 2 MP high resolution
- 2.8/4/6 mm fixed lens
- Base: Metal, Cover: Plastic
- Supports H.264 & H.264+
- IP67 & IK10, DWDR
- IR Range: Up to 30 m **973200T**
- Supports PoE



IPC-B220

2MP Bullet IR Network Camera

- Up to 2 MP high resolution
- 2.8/4/6 mm fixed lens
- Base Bracket: Metal, Cover: Plastic
- Supports H.264 & H.264+
- IP67, IK10, DWDR
- IR Range: Up to 30 m **934800T**
- Supports PoE



IPC-T120

2MP Turret IR Network Camera

- Up to 2 MP high resolution
- 2.8/4/6 mm fixed lens
- Eyeball: Plastic, Cover: Plastic
- Supports H.264 & H.264+
- IP67, DWDR
- IR Range: Up to 30 m **954000T**
- Supports PoE



IPC-B620-V/Z

2MP VF Bullet IR Network Camera

- Up to 2 MP high resolution
- 2.8 - 12 mm VF lens
- Full Metal
- Supports H.264 & H.264+
- IP67, 120 dB WDR
- IR Range: Up to 30 m **2046000T**
- Supports PoE & TF card slot,
- -V: manual vari-focal lens
- -Z: motorized vari-focal lens



IPC-T620

2MP VF Turret IR Network Camera

- Up to 2 MP high resolution
- 2.8 - 12 mm VF lens
- Eyeball: Metal, Cover: Plastic
- Supports H.264 & H.264+
- IP67, 120 dB WDR
- IR Range: Up to 30 m
- Supports PoE

NETWORK CAMERA



IPC-B120H

2MP Bullet IR Network Camera

- Up to 2 MP high resolution
- 2.8/4/6 mm fixed lens
- Supports H.265/H265+, H.264/H.264+
- Front Cover: Metal
- Rear Cover & Bracket: Plastic
- IR Range: Up to 30 m
- IP67, DWDR
- Supports PoE

1000000T



IPC-D120H

2MP Dome IR Network Camera

- Up to 2 MP high resolution
- 2.8/4/6 mm fixed lens
- Supports H.265/H265+, H.264/H.264+
- Front Cover: Metal, Bracket: Plastic
- IR Range: Up to 30 m
- IP67, IK10, DWDR
- Supports PoE

1080000T



IPC-T120H

2MP Turret IR Network Camera

- Up to 2 MP high resolution
- 2.8/4/6 mm fixed lens
- Supports H.265/H265+, H.264/H.264+
- Cover & Base: Metal, Eyeball: Plastic
- IR Range: Up to 30 m
- IP67, DWDR
- Supports PoE

1000000T



IPC-B620H-V/Z

2MP VF Bullet IR Network Camera

- Up to 2 MP high resolution
- 2.8 - 12 mm VF lens
- Supports H.265/H.265+, H.264/H.264+
- Full Metal
- IP67, 120dB WDR
- IR Range: Up to 30 m
- Supports PoE & TF card slot
- -V: manual vari-focal lens
- -Z: motorized vari-focal lens

1860000T



IPC-D640H-V/Z

4MP VF Dome IR Network Camera

- Up to 4 MP high resolution
- 2.8 - 12 mm VF lens
- Supports H.265/H.265+, H.264/H.264+
- IP67 & IK10, 120dB WDR
- IR Range: Up to 30 m
- Supports PoE & TF card slot
- -V: manual vari-focal lens
- -Z: motorized vari-focal lens

2270000T



IPC-B120

2MP Bullet IR Network Camera

- Up to 2 MP high resolution
- 2.8/4/6 mm fixed lens
- Supports H.264 & H.264+
- Front Cover: Metal
- Rear Cover & Bracket: Plastic
- IR Range: Up to 30 m
- IP67, DWDR
- Supports PoE

916800T

NETWORK CAMERA



IPC-D100

1MP Dome IR Network Camera

- Up to 1 MP high resolution
- 2.8/4/6 mm fixed lens
- Base: Metal, Cover: Plastic
- Supports H.264 & H.264+
- IP67 & IK10, DWDR
- IR Range: Up to 30 m
- Supports PoE



IPC-B200

1MP Bullet IR Network Camera

- Up to 1 MP high resolution
- 2.8/4/6 mm fixed lens
- Base Bracket: Metal, Cover: Plastic
- Supports H.264 & H.264+,
- IP67, IK10, DWDR
- IR Range: Up to 30 m
- Supports PoE



IPC-T100

1MP Turret IR Network Camera

- Up to 1 MP high resolution
- 2.8/4/6 mm fixed lens
- Eyeball: Plastic, Cover: Plastic
- Supports H.264 & H.264+
- IP67, DWDR
- IR Range: Up to 30 m
- Supports PoE

NETWORK PTZ



PTZ-N5225I-DE

2MP 25X 5 inch IR PTZ Network Camera

- Up to 2 MP high definition, 25x optical zoom
Color: 0.005 Lux @ F1.6, B/W: 0.001 Lux @ F1.6
- Supports H.265+ /H.265
- IP66, 120 dB WDR
- IR: 150 m
- 12V DC & Hi-PoE
- 24 privacy masks

6175000T



PTZ-N4225I-DE

2MP 25X 4 inch IR PTZ Network Camera

- Up to 2 MP high definition, 25x optical zoom
Color: 0.005 Lux @ F1.6, B/W: 0.001 Lux @ F1.6
- Supports H.265+ /H.265
- IP66, 120 dB WDR
- IR: 100 m
- 12V DC & PoE+
- 24 privacy masks

6175000T



PTZ-N4215I-DE

2MP 15X 4 inch IR PTZ Network Camera

- Up to 2 MP high definition, 15x optical zoom
Color: 0.005 Lux @ F1.6, B/W: 0.001 Lux @ F1.6
- Supports H.265+ /H.265
- IP66, 120 dB WDR
- IR: 100 m
- 12V DC & PoE+
- 24 privacy masks

45750000T



PTZ-N4215-DE3

2MP 15X 4 inch PTZ Network Camera

- Up to 2 MP high definition, 15x optical zoom
Color: 0.005 Lux @ F1.6, B/W: 0.001 Lux @ F1.6
- Supports H.265+ /H.265
- IP66, 120 dB WDR
- 12V DC & PoE+
- 24 privacy masks

4278000T

NVR

NVR-104MH-C

4-ch 1 HDD Network Video Recorder

- 40 Mbps input max.; up to 4 ch. IP camera input
- 4-ch 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 1 SATA interface, up to 6 TB
- Standalone 1U case (Metal)



1320000T

NVR-108MH-C

8-ch 1 HDD Network Video Recorder

- 80 Mbps input max., up to 8 ch. of IP camera input
- 4-ch 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 1 SATA interface, up to 6 TB
- Standalone 1U case (Metal)



1874000T

NVR-104MH-B

4-ch 1 HDD Network Video Recorder

- 40 Mbps input max.; up to 4 ch. IP camera input
- 4-ch 1080p or 1 ch. of 4K decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 1 SATA interface, up to 6 TB
- Standalone 1U case (Metal)



T

NVR-104MH-C/4P

4-ch 1 HDD 4 PoE Network Video Recorder

- 40 Mbps input max.; up to 4 ch. of IP camera input
- 4-Ch. 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 1 SATA interface, up to 6 TB
- Supports 4 POE interfaces
- Standalone 1U case (Metal)



2093000T

NVR-108MH-C/8P

8-ch 1 HDD 8 PoE Network Video Recorder

- 80 Mbps input max., up to 8 ch. of IP camera input
- 4-ch 1080p decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 1 SATA interface, up to 6 TB
- Supports 8 POE interfaces
- Standalone 1U case (Metal)



2960000T

NVR-104MH-B/4P

8-ch 1 HDD 4 PoE Network Video Recorder

- 40 Mbps input max.; up to 4 ch. IP camera input
- 4-ch 1080p or 1 ch. of 4K decoding capacity
- Supports H.265/H.265+, H.264/H.264+
- 1 SATA interface, up to 6 TB
- Supports 4 POE interfaces
- Standalone 1U case (Metal)





NVR-104-B

4-ch 1 HDD Network Video Recorder

- 40 Mbps input max.; up to 4 ch. IP camera input
- 4 ch. of 1080p or 2 ch. of 4 MP decoding capacity
- Supports H.264 & H.264+
- 1 SATA interface, up to 6 TB
- Mini 1U case (Plastic)

883000T



NVR-104-B/4P

4-ch 1 HDD 4 PoE Network Video Recorder

- 40 Mbps input max.; up to 4 ch. IP camera input
- 4 ch. of 1080p or 2 ch. of 4 MP decoding capacity
- Supports H.264 & H.264+
- 1 SATA interface, up to 6 TB
- Supports 4 PoE interfaces
- Mini 1U case (Plastic)



NVR-108-B

8-ch 1 HDD Network Video Recorder

- 60 Mbps input max., up to 4 ch. of IP camera input
- 4 ch. of 1080p or 2 ch. of 4 MP decoding capacity
- Supports H.264 & H.264+
- 1 SATA interface, up to 6 TB
- Mini 1U case (Plastic)

1100000T



NVR-108-B/8P

8-ch 1 HDD 8 PoE Network Video Recorder

- 60 Mbps input max., up to 8 ch. of IP camera input
- 4 ch. of 1080p or 2 ch. of 4 MP decoding capacity
- Supports H.264 & H.264+
- 1 SATA interface, up to 6 TB
- Supports 8 PoE interfaces
- Mini 1U case (Plastic)

SUPERIOR
PERFORMANCE-TO-PRICE
SURVEILLANCE

HILOOK
IP SOLUTION

Distributed by

TEHRAN NET

021 46083954

www.CCTV-IP.ir

HiLook